

UNIQUE TO BRITMET, THIS PROFILE WILL MATCH MANY TRADITIONAL ROOFS



- ✓ Educational buildings
- ✓ Commercial buildings
- ✓ Flat to pitch
- ✓ Community centres
- ✓ Vertical cladding
- ✓ Holiday homes
- ✓ Park homes
- ✓ Camping pods
- ✓ Stables
- ✓ Conservatories
- ✓ Lean to's
- ✓ Garages



UNIQUE TO BRITMET, THIS PROFILE WILL MATCH MANY TRADITIONAL ROOFS

ADVANTAGES

- British made
- Designed to give a traditional tile appearance
- Lightweight
- Low pitch
- Good vandal resistance (0.9mm steel base)
- Quick installation
- Cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- 50-year warranty
- Full technical support available

TECHNICAL DATA

- Min. pitch: 10 °
- Max. pitch: 90°
- Overall width: 1420mm
- Cover width: 1325mm
- Side lap: 105mm
- Step: 19mm
- Batten gauge (0.45mm): 365mm
- Batten gauge (0.9mm): 363mm
- Individual tile width: 165mm
- Roof cover per tile panel: 0.48m²
- Tiles panels per m²: 2.08
- Steel base: 0.45mm & 0.9mm
- Weight as laid per m²: 7kg & 11kg
- Fire resistance: AA classification equal to traditional roof tiles and slates

COLOURS AVAILABLE



Titanium Grey


Bramble Brown

Rustic Brown



Rustic Terracotta

Tartan Green

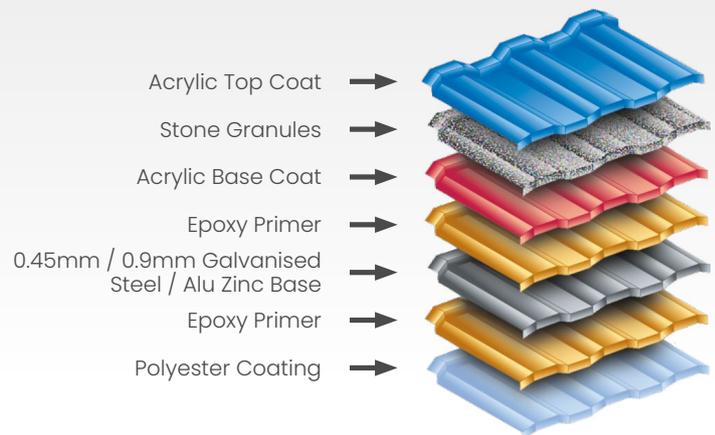

Acrylic Top Coat →

Stone Granules →

Acrylic Base Coat →

Epoxy Primer →

0.45mm / 0.9mm Galvanised
Steel / Alu Zinc Base →

Epoxy Primer →

Polyester Coating →



Kingfisher House, Unit 17, Overthorpe Road, Banbury OX16 4SX
T +44 (0) 1295 250998 F +44 (0) 1295 271068 E sales@britmet.co.uk

www.britmet.co.uk

APPROVALS:

- British Board of Agrément 02/3917
- Manufactured using ISO 9001 approved materials
- ISO 14001

