

*DESIGNED TO GIVE AN AUTHENTIC SHINGLE EFFECT*



- ✓ Educational buildings
- ✓ Commercial buildings
- ✓ Flat to pitch
- ✓ Community centres
- ✓ Vertical cladding
- ✓ Holiday homes
- ✓ Park homes
- ✓ Camping pods
- ✓ Stables
- ✓ Conservatories
- ✓ Lean to's



**DESIGNED TO GIVE AN AUTHENTIC SHINGLE EFFECT**


**ADVANTAGES**

- British made
- Designed to give a traditional shingle appearance
- Lightweight
- Low pitch
- Good vandal resistance
- Quick installation
- Cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- 50-year warranty
- Full technical support available
- Hidden fixing

**TECHNICAL DATA**

- Min. pitch: 15°
- Max. pitch: 90°
- Overall width: 1326mm
- Cover width: 1231mm
- Side lap: 95mm
- Step: 20mm
- Batten gauge (0.40mm): 258mm
- Roof cover per tile panel: 0.308m<sup>2</sup>
- Tile panels per m<sup>2</sup>: 3.2 No per m<sup>2</sup>
- Steel base: 0.40mm
- Weight as laid per m<sup>2</sup>: Under 7kg
- Fire resistance: AA classification equal to traditional roof tiles and slates

**COLOURS AVAILABLE**

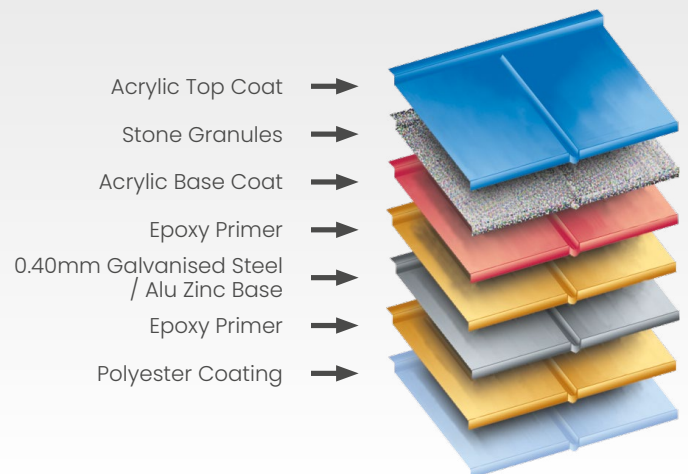

Kingfisher House, Unit 17, Overthorpe Road, Banbury OX16 4SX  
T +44 (0) 1295 250998 F +44 (0) 1295 271068 E sales@britmet.co.uk

[www.britmet.co.uk](http://www.britmet.co.uk)

**APPROVALS:**

- Manufactured using ISO 9001 approved materials
- ISO 14001